

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number  
WO 02/28340 A1

(51) International Patent Classification<sup>7</sup>: A61G 7/10

(21) International Application Number: PCT/CA00/01137

(22) International Filing Date: 6 October 2000 (06.10.2000)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): SUN-  
NYBROOK AND WOMEN'S COLLEGE HEALTH  
SCIENCES CENTRE [CA/CA]; 2075 Bayview Avenue,  
Toronto, Ontario M4N 3M5 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): FERNIE, Geoffrey,  
Roy [CA/CA]; 29 Blaketon Road, Etobicoke, Ontario M9B  
4W4 (CA). GRIGGS, Gerald, T. [CA/CA]; 77 Shrews-  
bury Square, Scarborough, Ontario M1T 1L4 (CA).

(74) Agent: GASTLE, James, E.; Gastle and Associates, P.O.  
Box 430, Lakefield, Ontario K0L 2H0 (CA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,  
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,  
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,  
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,  
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,  
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: PATIENT TRANSFER DEVICE

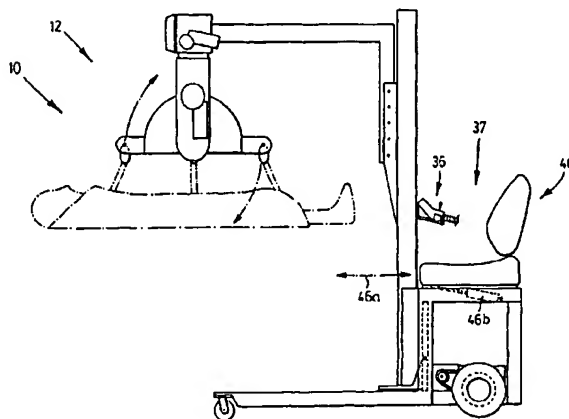

(57) Abstract: Disclosed herein is a patient transfer device comprising lifting arrangement positionable adjacent a patient and mov-  
able between a first position and a second position, and support arrangement for supporting the patient. The support arrangement  
is attachable to the lifting arrangement along a number of anchor locations thereon, the anchor locations including a pair of central  
anchor locations, a first pair of outer anchor locations on one side of the pair of central anchor locations and a second pair of outer  
anchor locations on an opposite side of the central pair of anchor locations; the support arrangement including a pair of central con-  
tact locations near a central location on the body of the patient, a first pair of outer contact locations on one side of the pair of central  
contact locations and a second pair of outer contact locations on an opposite side of the central pair of contact locations. The support  
arrangement is operable with the lifting arrangement for joining each of the anchor locations to a corresponding one of the contact  
locations, so as to transfer the patient between an inclined position and an upright orientation when the lifting arrangement moves  
between the first and second positions.

WO 02/28340 A1

PATIENT TRANSFER DEVICE  
BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

5       The present invention relates to patient transfer systems.

2. DESCRIPTION OF THE RELATED ART

Workers in the health care profession have seen an increase in the work load as governments  
10 cut back funding to, and thus lay-off of staff in, hospitals, nursing homes and the like. Reductions  
in available staff present additional challenges when physically incapacitated patients need transfer  
from one location to another. Traditionally this has been carried out by one or more staff who  
manually support the patient to a degree depending on the patient's ability. In some cases, particularly  
15 alongside the patient. In other cases, lifting devices are used to lift the patient in a sling and, with the  
help of staff be transferred by the lifting device as it rolls along the floor with the patient suspended  
off the floor.

These transfer methods are tedious and present significant risk of injury to the staff as a result  
20 of bearing the patient's weight and perhaps tripping or slipping during the transfer. These transfer  
methods are also unsatisfactory for the patient because of the potential of injury as well as an added  
loss of dignity and the fear of being dropped. There remains a need to improve patient transfer.

It is an object of the present invention to provide a novel patient transfer device.  
25

SUMMARY OF THE INVENTION

Briefly stated, the invention involves a patient transfer device comprising lifting means  
positionable adjacent the patient and movable between a first position and a second position, and

support means for supporting the patient, the support means being attachable to the lifting means along a number of anchor locations thereon, the anchor locations including a pair of central anchor locations, a first pair of outer anchor locations on one side of the pair of central anchor locations and a second pair of outer anchor locations on an opposite side of the central pair of anchor locations; 5 the support means including a pair of central contact locations near a central location on the body of the patient, a first pair of outer contact locations on one side of the pair of central contact locations and a second pair of outer contact locations on an opposite side of the central pair of contact locations; the support means being operable with the lifting means for joining each of the anchor locations to a corresponding one of the contact locations, so as to transfer the patient between an 10 inclined position and an upright orientation when the lifting means moves between the first and second positions.

In another aspect of the present invention, there is provided a device for transferring a patient, the patient having an upper region, a mid region and a lower region, the device comprising a lifting 15 means and a sling means, the sling means being dimensioned to extend beneath and along the upper, mid and lower regions, and transfer means arranged to join the lifting means with the sling means at a number of locations along the sling means, the locations being selected to cause the upper and lower regions to be rotated relative to the mid portion as the lifting means is moved between a first position and a second position.

20

In one embodiment, the lifting means includes at least one beam member, preferably two, which are aligned with the patient in one of the positions, wherein the transfer means includes a plurality of tension members mounted along the beams, including a central tension member and an outer tension member on each side thereof, wherein the central tension member engages the sling 25 means adjacent the mid region and the outer tension members engage the sling means adjacent the lower and upper regions respectively. More preferably, the lower region includes a patient's legs and each beam supports a pair of outer tension members on one side of the central tension members, each pair of outer tension members being arranged to engage the sling means on opposite sides of a corresponding one of the legs. A cross member joins the beams at one end, the cross member being

arranged to function as a hand grip for the patient.

In other aspect of the present invention, there is provided a patient transfer device, comprising a manipulator arrangement rotatable about a first axis between a plurality of operable positions, 5 support means supporting a patient beneath the manipulator arrangement, the manipulator arrangement including a pair of central anchor locations to support the patient on opposite sides and near the buttocks thereof and a pair of outer anchor locations on either side of the central anchor locations to support the patient on opposite sides of and at spaced locations from the buttocks, the central and outer anchor locations being arranged to move the patient from an inclined orientation 10 to an upright orientation when the manipulator moves between at least two of the operable positions.

In one embodiment, the manipulator arrangement includes a pair of beam members arranged to extend along the patient in one operative position and rotatable about the first axis, each of the beam members having central regions providing the central anchor locations and opposed end regions 15 providing a corresponding one of the outer anchor locations. The beams form a plane and the rotation axis extends through the plane. A cross member extends between the beams at corresponding adjacent end regions thereof and is rigidly coupled therewith. The beams in the second operative position extend in front of the patient and the cross member is arranged to extend sufficiently close to the patient for gripping the cross member for support. Desirably, the cross 20 member is provided with a pair of handle formations thereon. Preferably, the manipulator arrangement may include a pair of frame members, each of which is jointed to a corresponding beam member, the beam members being movable relative thereto.

In still another aspect of the present invention, there is provided a device for supporting a 25 patient, the patient having an upper region, a mid region and a lower region, the device operable for connection to a manipulator arrangement to be positioned above the patient, the harness being dimensioned to extend beneath and along the upper, mid and lower regions and providing a central contact location adjacent each of the mid regions, and a pair of outer contact locations adjacent the upper and lower regions, tension members joining each of the contact locations, each of the tension

members being arranged to transfer the patient from an inclined orientation to an upright orientation.

In one embodiment, the harness includes a first end to be positioned adjacent the legs of the patient and a second end to be positioned near the head of the patient, each of the contact locations  
5 to be positioned adjacent an outer side of a corresponding leg of the patient. The harness includes a sheet member having a pair of longitudinal peripheral regions to lie adjacent each side of the patient, each of the central contact locations and each of outer contact locations being defined on a corresponding one of the peripheral regions.

10 Preferably, the harness provides a supplemental outer contact location adjacent an inner side of a corresponding leg of the patient. The sheet has a pair of inner peripheral edge regions in the first end defining a centrally located longitudinally oriented gap, each of the supplemental outer contact locations being positioned adjacent the gap. A flap portion is provided on each on inner peripheral edge region and each of the third outer contact locations are formed on a corresponding flap portion.

15

In still another aspect of the present invention, there is provided a device for transferring a patient, comprising a pair of beam members extending along the patient in one operative position, and rotatable about a beam rotation axis, the beam members having a opposed end regions, support means for supporting the patient, the support means including first and second attachment locations, first  
20 and second joining means for joining each of the first and second attachment locations with a corresponding end region, the locations being selected to transfer the patient from an inclined orientation to an upright orientation when the beams rotate between first and second operative positions relative to the beam rotation axis.

25 In one embodiment, the beams form a plane, the rotation axis extends through the plane and a cross member extends between the beams at corresponding adjacent end regions thereof and is rigidly coupled therewith. Preferably, the beams in the second operative position extend in front of the patient. The cross member is conveniently provided with a pair of handle formations thereon and

is arranged to extend sufficiently close to the patient for gripping the cross member for support and cross member .

In yet another aspect of the present invention, there is provided a method of transferring a  
5 patient from an inclined orientation to an upright orientation, comprising the steps of:

providing a support beneath the patient,

providing on the support a pair of central contact locations near the buttocks of the patient  
10 and on opposite sides thereof;

providing on the support a pair of outer contact locations on opposite sides of the pair of  
central contact locations and spaced therefrom, wherein the support is capable of bearing the weight  
of the patient in the inclined orientation at the central and outer contact locations; and  
15

lifting the support at the central and outer contact locations in such a manner to raise the  
patient to the upright orientation.

#### BRIEF DESCRIPTION OF THE DRAWINGS

20

Several preferred embodiments of the present invention will now be described, by way of  
example only, with reference to the appended drawings in which:

Figure 1 is a side view of a patient transfer device;

25

Figure 2 is a partial fragmentary sectional front view of the device of figure 1;

Figure 2a is a sectional fragmentary view of a portion of the device of figure 1;

Figure 3 is a rear view of the device of figure 1;

Figure 4 is a fragmentary perspective view of the device of figure 1 in an operative position;

5 Figure 5 is a perspective view of the device of figure 1 in another operative position;

Figure 6 is a fragmentary perspective view of the device of figure 1 in still another operative position;

10 Figures 6A, 6B, 6C 6D are fragmentary perspective views of the device of figure 1 in still other operative positions;

Figure 7 is a fragmentary perspective view of a portion of the device of figure 1;

15 Figure 8 is a fragmentary perspective view of another portion of the device of figure 1;

Figure 9 is a side view of the another patient transfer device in an operative position;

Figure 10 is a fragmentary perspective view of another patient transfer device; and  
20

Figures 11A and 11B are perspective views of portions of other alternative patient transfer devices.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

25

As will be described, there is provided a patient transfer device 10 having a lifting means 12 in the form of a manipulator arrangement, which is positionable adjacent the patient and movable between a first position, such as that shown in figure 6 and a second position as shown in figure 4. Support means generally shown at 14 in figures 4 to 6 is provided in the form of a harness or sling

and is attachable to the lifting means 12 along a number of anchor locations, including a pair of central anchor locations 12a, a first pair of outer anchor locations 12b and a second pair of outer anchor locations 12c. The harness includes a pair of central contact locations 14a near a central body location, such as the buttocks or pelvis, of the patient, a first pair of outer contact locations 14b and  
5 a second pair of outer contact locations 14c. Preferably, the anchor locations lie in a common plane rotatable relative to a first rotation axis A1 as shown in figure 4. In this particular case, the anchor locations are fixed in position relative to one another and the central contact locations are movable relative to one another as the patient moves between a inclined orientation as seen in figure 6 and an upright orientation as shown in figure 4.

10

As will be described, the harness 14 provides a third pair of outer contact locations 14d in the region of the first pair of contact locations for reasons to be explained. As shown in figure 7, the harness, in this case, includes a sheet material 18, having a pair of longitudinal peripheral regions 18a, 18b to lie adjacent a corresponding side of the patient. Each of the central contact locations and each  
15 of first and second pairs of outer contact locations are, in this case, defined on a corresponding peripheral region. A plurality of length adjustable tension members 19, in this case in the form of straps, are fastened to the sheet 18 and provided with an appropriate coupling such as a hook or loop to join each of the contact locations with a corresponding anchor location, which in this case are provided in the form of rings 13.

20

The harness includes a first end 14g to be positioned adjacent the legs of the patient and a second end 14h to be positioned near the head of the patient and is provided with reinforced regions 14i in the second end 14h to provide additional support to the head and neck. Each of the first outer contact locations 14b are positioned adjacent an outer side of a corresponding leg of the patient,  
25 while each of the third outer contact locations 14d are positioned adjacent an inner side of a corresponding leg of the patient. To that end, the sheet has a pair of inner peripheral edge regions 18c, 18d in the first end defining a centrally located longitudinally oriented gap 18e. Each of the third outer contact locations 14d are located adjacent the gap. More particularly, the sheet has a pair of flap portions 18f, 18g and each of the third outer contact locations are, in effect, formed on a



corresponding flap portion.

The harness is configured to support the patient in a number of locations and operates on the principle that these multiple locations can be controlled by the lifting means to transfer the patient  
5 from the inclined orientation to the upright orientation. Moreover, the patient can, with operator practice, be transferred from a bed in the inclined orientation, directly to a chair in the upright orientation essentially without need for further manual adjustments being made by the staff to the patient, such as by drawing the patient into the chair or the like.

10 This is due to the fact that the straps at the shoulder in effect urge the patients back not only upward but also in the horizontal direction toward the buttocks, that is from 'A' toward 'C' in figure 6C. Similarly the straps at the knees bias them in the opposite horizontal direction toward the buttocks from 'B' to 'C'. The net effect, therefore is that the portion of the harness adjacent the back of the patient is rotated upwardly relative to the patient's hips and in the direction of arrow D.  
15 Therefore, the harness is not only capable of lifting and transferring the patient in the horizontal orientation but also is capable of bringing the patient to an upright orientation or sitting position simply through the transfer of the lifting means.

It should be pointed out that the harness in figure 6C is slightly shorter than that shown in  
20 figure 6 and is desirable in this instance because the shorter harness does allow the legs to bend comfortably at the knee in the upright orientation.

The harness also provides an improved degree of security to the patient because the harness has the ability to engage the patient in a number of locations which themselves are passed through  
25 coordinated movements. These locations generally include the shoulder region, the buttocks or pelvic region and the knee region.

In this particular case, the knee region is not provided with just two locations but rather with four. This allows the harness to support the patient by bearing the entire weight of the patient

without having to draw the legs of the patient tightly toward one another, at the expense of patient comfort. Instead, each leg can be independently lifted by the harness.

The spacing of the multiple locations of the harness also increases the control of the patient's motion during both the transfer as aforementioned and during the travel with the patient on board, that is from one room to another. The patient, in this case, is less apt to swing uncontrollably as can be the case with conventional lifting devices. Furthermore, when the device 10 is turned at a corner, say when moving from a hallway into a hospital room, the patient's body should also change direction in a controlled manner with the device as the forces are applied to a number of spaced locations along the patient.

Referring to figures 4 and 6, the lifting means 12 includes a pair of beam members 20 which themselves have a first end 20a and a second end 20b, with a cross member 22 joining the first ends as shown in figures 4 and 5. The cross member also provides a convenient location for handle formations with reach of the patient in this upright position, giving the patient an enhanced feeling of security. The lifting means 12 has a track portion 24, and a carriage portion 26 movable relative to the track portion along axis A4. The carriage portion includes mounting means for mounting the beam members thereto, in the form of a yoke arrangement 28 extending between the carriage member and the beam members. The yoke arrangement is mounted for movement relative to the carriage about an yoke swivel axis A2, while the beam members are mounted for synchronized movement relative to the yoke arrangement about a beam rotation axis. In this particular case, the beam rotation axis is coextensive with the first rotation axis A1.

The lifting means also includes a lift portion 30 and the track portion is mounted for movement relative thereto along a lift axis A3. The lift portion includes a truck 32 having a height adjustable post 34 extending upwardly therefrom and means for lifting the post relative to the truck, such as a screw thread hoist mechanism 35 as shown in figures 2 and 2a, wherein the post has a movable portion 34a which moves relative to a fixed portion 34b, wherein the movable portion 34a travels with a screw element 34c, itself entrained for travel along the screw shown at 35. The

movable portion 34a is adjustably engaged with an upright portion 34d which itself is joined to the track portion 24. The truck is provided with a set of controls 36 and an operator location 37 on which a truck operator is situated to operate the truck. The controls operate, among other things, a beam motor mechanism 38 for displacing the beam members relative to the yoke arrangement, and  
5 a yoke motor mechanism 40 for displacing the yoke arrangement relative to the carriage portion as well as the screw thread hoist mechanism 35.

Looking at the beam motor mechanism 38 in more detail as shown in figures 2 and 4, the yoke arrangement 28 has a pair of frame members in the form of legs 28a and the beam members 20 are  
10 pivoted to the legs by way of a pivot shaft 38a which is entrained with a lower sprocket 38b which in turn is entrained with an upper sprocket 38c and a sprocketed motor 38d by way of a chain 38e. The upper sprocket 38c is fixed to one end of a transfer shaft 38f held in bearings 38g in such a manner that the transfer shaft 38f transfers power between the left and right upper sprockets 38c as viewed in figure 2 so that the motor, on the right hand side, is able to control simultaneously the  
15 displacement of both the right hand and left hand beam members 20. For safety reasons, the beam members are provided with guards 21 which prevent the device operator or patient from getting hands jammed between the beam members and the yoke arrangement during movements therebetween and, in this case, are semicircular.

20 The yoke arrangement 28 is pivotally connected to the carriage 26 by way of a pivot shaft 28b which, by way of a worm gear 40a, is engaged with a yoke motor mechanism 40. The carriage, in turn, is slidably engaged with the track member 24 by way of a motor mechanism, not shown.

The operator location includes a seat 46, which is movable between a first position remote  
25 from the patient shown in solid lines in figure 1 toward the patient as shown by arrow 46a by way of a linear actuator 48b, enabling direct contact between the operator and the patient, for reasons to be described.

To operate the device, the patient is first fitted with the harness. This could mean, for

example, that the patient is inclined on a bed and is rolled to one side to insert the harness beneath her. In this case, the tension members may be adjusted depending on the height, size of patient and the type of transfer. Alternatively, the patient perhaps could be seated on a chair which already has the harness in the appropriate orientation to receive the patient, that is the first end of the harness  
5 nearer to the floor and the second end perhaps draped over the back of the chair. Alternatively, the harness may be inserted behind an already seated patient and can also be removed from behind the seated patient by having the patient move to one side and then another.

The operator is then seated at the operator location and directs the device toward a patient  
10 and the orientation of the beam members is arranged depending on the orientation of the patient. For example, if the patient is lying on a bed, the beam members may be moved to their first position as shown in figure 1 and the elevation of the beam members lowered to a safe distance above the patient, while allowing the straps of the harness to connected to their appropriate locations on the beam members. The operator then manipulates the controls as needed to transfer the patient to an  
15 intermediate position where the beams extend in front of the patient and the patient can, if desired, grip the cross member 22 for an added sense of security. This might include, for example, swivelling the yoke arrangement so that the patient moves from the position as shown in figure 4 to a reversed position as shown in figure 5.

20 Thus, the cross member 22, when gripped by the patient, can add to the patient's stability if the patient is in fact above to grip the cross member when being transferred in the final stages of the upright orientation, that is as shown in figure 6D, thus reducing the fear of tumbling forward. In this case, the cross member acts as a barrier for the patient when in the upright orientation.

25 The operator can, if desired, shift the seat closer toward the patient so that the operator can place a hand on the patient either to guide the patent while being swivelled or simply to give a sense of security to the patent during travel. When in the reversed position of figure 5, the operator can move the seat sufficiently close to embrace the patient if desired with the operators knees and hand while manipulating the controls to cause the truck to travel to another location. The patient, in this

instance, is not merely dangling from the lifting device but rather is being guided both by the harness and by the physical contact with the operator, if necessary. The operator can then manipulate the controls to transfer the patient to another position, perhaps to another chair which would involve returning the patient to an orientation according to figure 4 or to an inclined or lying position on a  
5 bed or stretcher as shown by figure 6.

This transfer from the upright orientation to the inclined orientation, although involving a rather complex movement of the body, involves the relatively simple task of bringing the beam members from their position as shown in figure 6C to that shown in figure 6 and in so doing cause  
10 the body to be returned in a smooth transition back to an inclined orientation.

During the transfer, the beams move to change the relative positions of the anchor locations and the contact locations, the former of which remain fixed in length from one another, but change in elevation relative to one another. In effect, each of the outer anchor locations draw a circular arc  
15 in space relative to the central anchor location. The central anchor location may also draw an arc relative to the first rotation axis A1 depending on the spacing therebetween. The contact locations, in contrast to the anchor locations in this case, are not fixed in length relative to one another and they are defined by the orientation of the harness. They may in fact move toward or away from one another and this combination of the fixed anchor locations and the movable contact locations does  
20 present a smooth transition for the patient from the inclined and upright orientations.

A particular feature of the device is that the harness can be used to bring the patient to a position equivalent to that which the patient essentially would adopt if sitting in a chair. This can be seen in figure 6D where the beam members the patient's back is essentially upright and not slouched  
25 as in the position shown in figure 6C. The position in figure 6D is useful because the operator can position the patient in a chair with the patient's pelvic region comfortably pressed against the back of the chair.

If desired, a supplemental patient seat 50 may be provided as shown in figure 5 for supporting

the patient when the patient during transfer. In this case, the supplemental patient seat is positioned on the lift portion.

Referring to figure 10, another device is shown at 100. In this case, lift portion 102 includes  
5 a truck, not shown, having a height adjustable post 104 which in this case extends upwardly from behind the operator rather than in front of the operator as in the device 10 hereinabove. The track portion 106 is oriented so as to extend the carriage portion in front of the truck and in a manner to minimize the operator's obstruction. To achieve this, the track portion includes a frame, or jib, with a remote region 108 to engage the carriage portion and an intermediate region 110 positioned  
10 between the remote region and the lift portion, the intermediate region being offset from the remote region and away from the operator location.

This should allow the operator to interact with greater freedom with the patient. For example, the operator can bring the patient closer without potential injury through collisions with the post 104.  
15 This is a particular benefit since the ability for the operator and the patient to interact closely provides for greater safety and comfort of the patient and avoids the operator having to step off the device to reach for certain tasks and the need to recruit an assistant to help. For example, it may be possible to bring the patient to a horizontal orientation and in close proximity with the operator, so that the operator can lift the patient's lower legs to position them on an operating table or bed. This should  
20 also be advantageous with the adjustable seat of the earlier embodiment so that the operator and the patient can interact more closely without the need for the operator to step off the device.

Referring to figure 9, there is provided still another patient transfer device 120. In this case, the harness 122 has tension members 124 where at least some of the tension members are length  
25 adjustable and dispensing mechanisms 126 are provided for dispensing the tension members to a predetermined length, in a manner similar to a tape measure. The dispensing mechanisms 126 can, if desired, be arranged to dispense the tension members to a constant length or alternatively be provided with a locking mechanism to lock the length of the tension members as desired. In addition, the dispensing mechanisms may also be motorized if desired to control the length of the tension

members and thus to give another degree of postural control while moving between the inclined and upright orientations.

If desired, the harness may be incorporated into an article of clothing to be worn by the patient  
5 as shown at 150 in figures 11A and 11B. In this case, the tension members may include straps 152  
with one end fastened to the article of clothing, that is to one of a number of contact locations, in the  
form of rings 154, as described hereinabove. Thus the article 150 can function as a wearable sling  
which should reduce the effort required to put patients on and off slings during the day and should  
reduce any stigma or awkwardness felt by the patient as a result of being left on a sling as mentioned  
10 hereinabove, should this become a problem for the patient. This wearable sling can be made of  
materials that can be coloured appropriately to be attractive and can be equipped with loops or rings  
as shown herein or with the tension members incorporated therewith. In this case, the wearable sling  
150 or the harness as shown above can be used along with other versions thereof with the device 10.

15 Thus, the device 10 provides a method of transferring a patient from an inclined orientation  
to an upright orientation, comprising the steps of:

providing a support beneath the patient,

20 providing on the support a pair of central contact locations near the a central body location  
of the patient and on opposite sides thereof;

providing on the support a pair of outer contact locations on opposite sides of the pair of  
central contact locations and spaced therefrom, wherein the support is capable of bearing the weight  
25 of the patient in the inclined orientation at the central and outer contact locations; and

lifting the support at the central and outer contact locations in such a manner to raise the  
patient to the upright orientation.

In this case, a first of the pairs of outer contact locations are positioned near a shoulder region of the patient, the step of lifting further comprises the step of raising the first pair of outer contact locations a distance greater than the pair of central contact locations in the upright orientation. A second of the pairs of outer contact locations are positioned near a leg of the patient, the step of  
5 lifting further comprises the step of raising the second pair of outer contact locations to position lower than the central contact locations in the upright orientation.

The step of lifting may include the steps of providing a manipulator arrangement with a pair of central anchor locations and a pair of outer anchor locations on opposite sides of the pair of central  
10 anchor locations and spaced therefrom; joining each of anchor locations with a corresponding contact location; and actuating the manipulating arrangement.

The actuating step includes the steps of arranging the anchor locations in position relative to a plane and rotating the plane about a first axis.  
15

The step of arranging the anchor locations includes the step of fixing the anchor locations relative to one another. The step of arranging the anchor locations includes the steps of providing a pair of beam members, and spacing the beam members so as to be aligned along respective sides of the patient.  
20

The method herein may also include the steps of joining one end of each of the beams with a cross member; and providing a pair of handle formations on the cross member so that the patient can grip the cross member for support.

25 Thus, the devices and techniques herein provide a safe and economical technique for transferring patients between inclined and upright orientations. There are of course numerous alternatives that can be employed while not departing from scope of the present invention. For example, provision may be made to adjust the position of the anchor locations relative to one another by arranging the beam members to be length adjustable. The beam members need not necessarily



rotate about a rotation axis that extends through the beam members themselves but rather an axis that is laterally spaced therefrom. The harness used with the device need not necessarily be a sling as shown herein but may provide the multiple contact locations in other forms. The device may also work in some cases with just one beam located above the patient, provided the harness provides

5 sufficient space to allow the patient to move between the inclined and upright orientations in comfort. The beam members need not necessary be planar but may be articulated or be bent along their length as desired. The beams may be narrower or wider than the length of the patient and may, if desired, be made adjustable to accommodate different patients. The device may also provide some benefits when used with the beams supporting the harness by two anchor locations, rather than three as above

10 mentioned.

## CLAIMS

1. A patient transfer device comprising:

5                   lifting means positionable adjacent a patient and movable between a first position and a second position, and

                  support means for supporting said patient, said support means being attachable to said  
lifting means along a number of anchor locations thereon, said anchor locations including a  
10           pair of central anchor locations, a first pair of outer anchor locations on one side of said pair  
of central anchor locations and a second pair of outer anchor locations on an opposite side  
of said central pair of anchor locations; said support means including a pair of central contact  
locations near a central location on the body of said patient, a first pair of outer contact  
locations on one side of said pair of central contact locations and a second pair of outer  
15           contact locations on an opposite side of said central pair of contact locations;

                  said support means being operable with said lifting means for joining each of said  
anchor locations to a corresponding one of said contact locations, so as to transfer said  
patient between an inclined position and an upright orientation when said lifting means moves  
20           between said first and second positions.

2. A device as defined in claim 1 wherein each of said outer anchor locations draws an arc  
relative to a corresponding one of said central anchor locations when said lifting means moves  
between said first and second positions.

25           3. A device as defined in claim 2 wherein said anchor locations lie in a common plane rotatable  
relative to a first rotation axis.

4. A device as defined in claim 3 wherein said rotation axis is positioned near said pair of central

anchor locations and said outer anchor locations draw an arc in a common clockwise sense.

5. A device as defined in claim 1 wherein said anchor locations are fixed in position relative to one another and said central contact locations are movable relative to one another as said patient moves between inclined and upright orientations.
6. A device as defined in claim 5 wherein said lifting means includes a pair of beam members, wherein said support means includes a plurality of tension members for joining each of said contact locations with a corresponding one of said anchor locations.
7. A device as defined in claim 6 further comprising a third pair of outer contact locations near said first pair of contact locations, said plurality of tension members further including a pair of tension members, each for joining each of said third outer contact locations with a corresponding one of said outer anchor locations.
8. A device as defined in claim 7 wherein said support means further comprises a harness, wherein each of said central contact locations are defined thereon.
9. A device as defined in claim 8, wherein said harness includes a first end to be positioned adjacent the legs of said patient and a second end to be positioned near the head of said patient, each of said first outer contact locations being positioned adjacent an outer side of a corresponding leg of said patient, each of said third outer contact locations being positioned adjacent an inner side of a corresponding leg of said patient,
10. A device as defined in claim 9 wherein said harness includes a sheet member having a pair of longitudinal peripheral regions to lie adjacent each side of said patient, each of said central contact locations and each of first and second pairs of outer contact locations being defined on a corresponding one of said peripheral regions.

11. A device as defined in claim 10 wherein said sheet has a pair of inner peripheral edge regions in said first end defining a centrally located longitudinally oriented gap, each of said third outer contact locations being positioned adjacent said gap.
- 5 12. A device as defined in claim 11 further comprising a pair of flap portions, each of said third outer contact locations being formed on a corresponding flap portion.
13. A device as defined in claim 12 wherein said lifting means further comprises a track portion, a carriage portion movable along said track portion, said carriage portion including mounting means for mounting said beam members thereto.
- 10 14. A device as defined in claim 13 wherein said mounting means includes a yoke portion extending between said carriage member and said beam members.
- 15 15. A device as defined in claim 14 wherein said yoke portion is mounted for movement relative to said carriage about an yoke swivel axis.
16. A device as defined in claim 15 wherein said beam members are mounted for synchronized movement relative to said yoke portion about a beam rotation axis.
- 20 17. A device as defined in claim 16 wherein said beam rotation axis is coextensive with said first rotation axis.
18. A device as defined in claim 17 wherein said beam members have a first end and a second end, further comprising a cross member joining said first ends.
- 25 19. A device as defined in claim 18 further comprising a lift portion, said track portion being mounted for movement relative thereto along a lift axis.

20. A device as defined in claim 19 wherein said lift portion includes a truck and a post extending upwardly therefrom and means for lifting said post relative to said truck.
21. A device as defined in claim 20 wherein said truck further comprises a set of controls and an operator location on which a truck operator is situated to operate said truck.
22. A device as defined in claim 21 wherein said track portion is oriented so as to extend said carriage portion in front of said truck and in a manner not to obstruct said operator location.
23. A device as defined in claim 22 wherein said track portion includes a frame with a remote region to engage said carriage portion and an intermediate region positioned between said remote region and said lift portion, said intermediate region being offset from said remote region and away from said operator location.
24. A device as defined in claim 23 further comprising beam motor means for displacing said beam members relative to said yoke portion, and yoke motor means for displacing said yoke portion relative to said carriage portion.
25. A device as defined in claim 7 wherein at least some of said tension members are length adjustable.
26. A device as defined in claim 25 further comprising dispensing means for dispensing said tension members to a predetermined length.
27. A device as defined in claim 8 wherein said harness is incorporated into an article of clothing to be worn by said patient.
28. A device as defined in claim 27 wherein said tension members further comprise straps with one end fastened to said article of clothing.

29. A device as defined in claim 23 wherein said operator location includes a seat, said seat being movable between a first portion remote from said patient and a second portion adjacent said patient.
- 5 30. A device as defined in claim 19 further comprising a supplemental patient seat for supporting said patient when said patient during transfer.
31. A device as defined in claim 30 wherein said supplemental patient seat is positioned on said lift portion.
- 10 32. A device for transferring a patient, said patient having a upper region, a mid region and a lower region, said device comprising a lifting means and a sling means, said sling means being dimensioned to extend beneath and along said upper, mid and lower regions, and transfer means arranged to join said lifting means with said sling means at a number of locations along said sling means, said locations being selected to cause said upper and lower regions to be rotated relative to said mid portion as said lifting means is moved between a first position and a second position.
- 15 33. A device as defined in claim 32 wherein said lifting means includes at least one beam member which is aligned with said patient in one of said positions, wherein said transfer means includes a plurality of tension members mounted along said beam.
- 20 34. A device as defined in claim 33 wherein said lifting means includes a pair of spaced beam members, each supporting a plurality of tension members.
- 25 35. A device as defined in claim 34 wherein each of said beam members supports a central tension member and an outer tension member on each side thereof, wherein said central tension member engages said sling means adjacent said mid region and said outer tension members

engage said sling means adjacent said lower and upper regions respectively.

36. A device as defined in claim 35 wherein said lower region includes a patient's legs and each beam supports a pair of outer tension members on one side of said central tension members,  
5 each pair of outer tension members being arranged to engage said sling means on opposite sides of a corresponding one of said legs.

37. A device as defined in claim 36 further comprising a cross member joining said beams at one end, said cross member being arranged to function as a hand grip for said patient.  
10

38. A device as defined in claim 37 wherein said tension members are length extensible.

39. A device as defined in claim 38 further comprising dispensing means for dispensing at least some of said tension members to a predetermined length.  
15

40. A patient transfer device, comprising a manipulator arrangement rotatable about a first axis between a plurality of operable positions, support means supporting a patient beneath said manipulator arrangement, said manipulator arrangement including a pair of central anchor locations to support said patient on opposite sides and near a central body location thereof  
20 and a pair of outer anchor locations on either side of said central anchor locations to support said patient on opposite sides of and at spaced locations from said central body location, said central and outer anchor locations being arranged to move said patient from an inclined orientation to an upright orientation when said manipulator moves between at least two of said operable positions.

25  
41. A device as defined in claim 40 wherein said manipulator arrangement includes a pair of beam members arranged to extend along said patient in one operative position and rotatable about said first axis, each of said beam members having central regions providing said central anchor locations and opposed end regions providing a corresponding one of said outer anchor

locations.

42. A device as defined in claim 41 wherein said beams form a plane, said rotation axis extends through said plane.
- 5
43. A device as defined in claim 41 further comprising a cross member extending between said beams at corresponding adjacent end regions thereof.
44. A device as defined in claim 43 wherein said cross member is rigidly coupled to said beams.
- 10
45. A device as defined in claim 44 wherein said beams in said second operative position extend in front of said patient, said cross member being arranged to extend sufficiently close to said patient for gripping said cross member for support.
- 15
46. A device as defined in claim 45 wherein said cross member is provided with a pair of handle formations thereon.
47. A device as defined in claim 46 wherein said manipulator arrangement includes a pair of frame members, each of which is jointed to a corresponding beam member.
- 20
48. A device for transferring a patient, comprising a pair of beam members extending along said patient in one operative position, and rotatable about a beam rotation axis, said beam members having a opposed end regions, support means for supporting said patient, said support means including first and second attachment locations, first and second joining means for joining each of said first and second attachment locations with a corresponding end region, said locations being selected to transfer said patient from an inclined orientation to an upright orientation when said beams rotate between first and second operative portions relative to said beam rotation axis.
- 25



49. A device as defined in claim 48 wherein said beams form a plane, said rotation axis extends through said plane.
50. A device as defined in claim 49 further comprising a cross member extending between said  
5 beams at corresponding adjacent end regions thereof.
51. A device as defined in claim 50 wherein said cross member is rigidly coupled to said beams.
52. A device as defined in claim 51 wherein said beams in said second operative position extend  
10 in front of said patient, said cross member being arranged to extend sufficiently close to said patient for gripping said cross member for support.
53. A device as defined in claim 52 wherein said cross member is provided with a pair of handle  
15 formations thereon.
54. A method of transferring a patient from an inclined orientation to an upright orientation, comprising the steps of:
- providing a support beneath said patient,
- 20 providing on said support a pair of central contact locations near a central body location of said patient and on opposite sides thereof;
- providing on said support a pair of outer contact locations on opposite sides of said  
25 pair of central contact locations and spaced therefrom, wherein said support is capable of bearing the weight of said patient in said inclined orientation at said central and outer contact locations; and
- lifting said support at said central and outer contact locations in such a manner to raise

said patient to said upright orientation.

55. A method as defined in claim 54, wherein a first of said pairs of outer contact locations are positioned near a shoulder region of the patient, the step of lifting further comprises the step of raising the first pair of outer contact locations a distance greater than said pair of central contact locations in said upright orientation.

56. A method as defined in claim 55 wherein a second of said pairs of outer contact locations are positioned near a leg of said patient, the step of lifting further comprises the step of raising the second pair of outer contact locations to position lower than said central contact locations in said upright orientation.

57. A method as defined in claim 56 wherein the step of lifting further comprising the steps of:  
providing a manipulator arrangement with a pair of central anchor locations and a pair of outer anchor locations on opposite sides of said pair of central anchor locations and spaced therefrom;

joining each of anchor locations with a corresponding contact location; and  
actuating said manipulating arrangement.

58. A method as defined in claim 57 wherein said actuating step includes the steps of:  
arranging said anchor locations in position relative to a plane; and  
rotating said plane about a first axis.

59. A method as defined in claim 58 wherein the step of arranging said anchor locations includes

the step of fixing said anchor locations relative to one another.

60. A method as defined in claim 59 wherein the step of arranging said anchor locations includes the steps of:

5

providing a pair of beam members, and


spacing said beam members so as to be aligned along respective sides of said patient;.

- 10 61. A method as defined in claim 60, further comprising the step of joining one end of each of said beams with a cross member.

62. A method as defined in claim 61, further comprising the step of providing a pair of handle formations on said cross member so that said patient can grip said cross member for support.

15

1/15

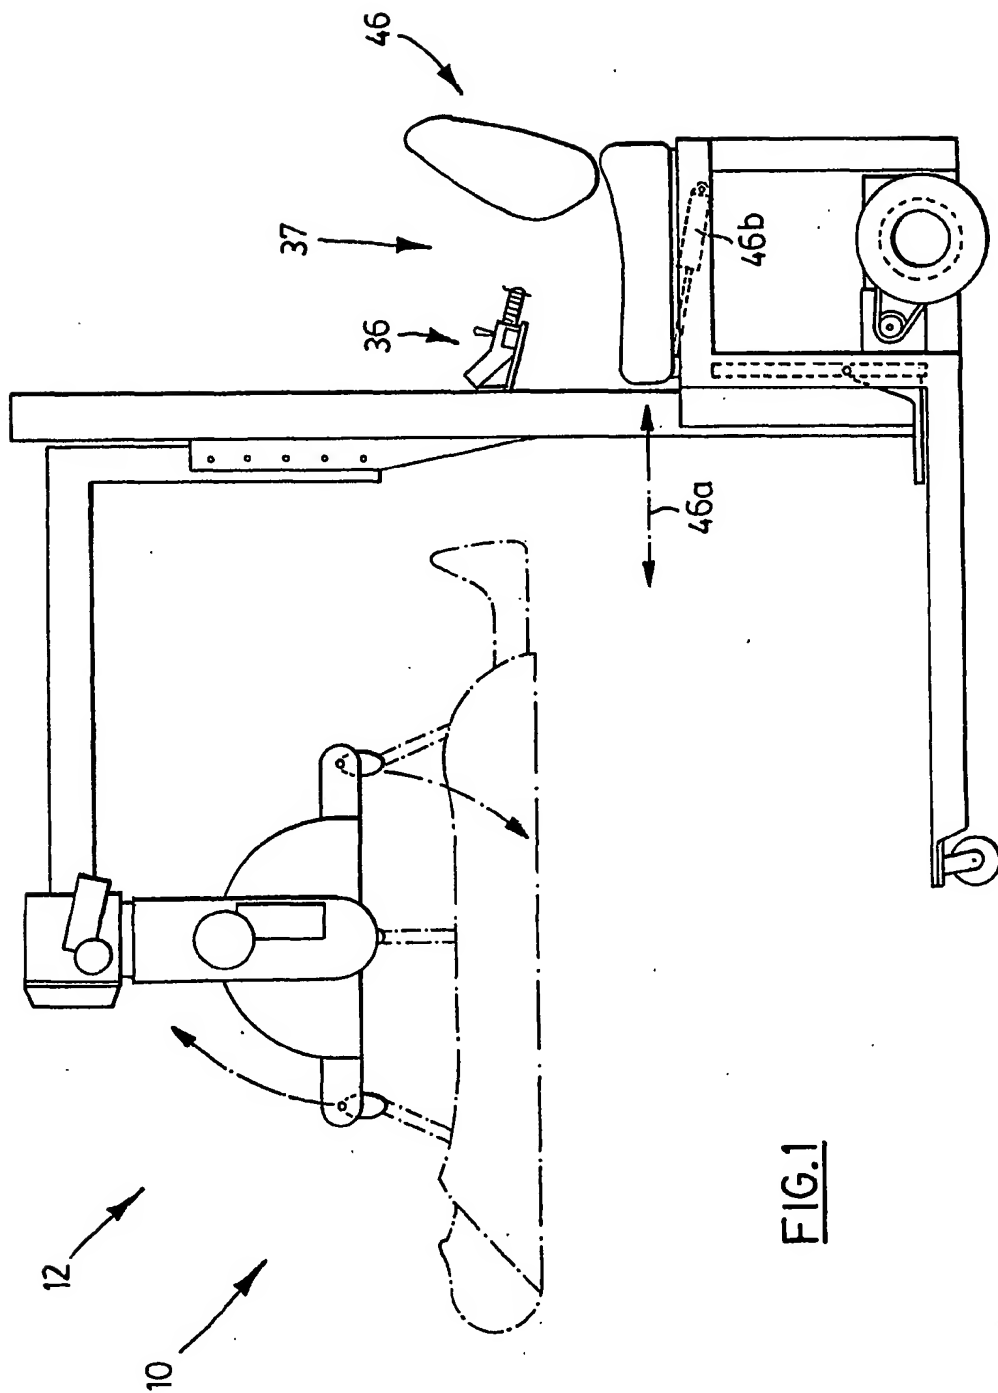

2/15

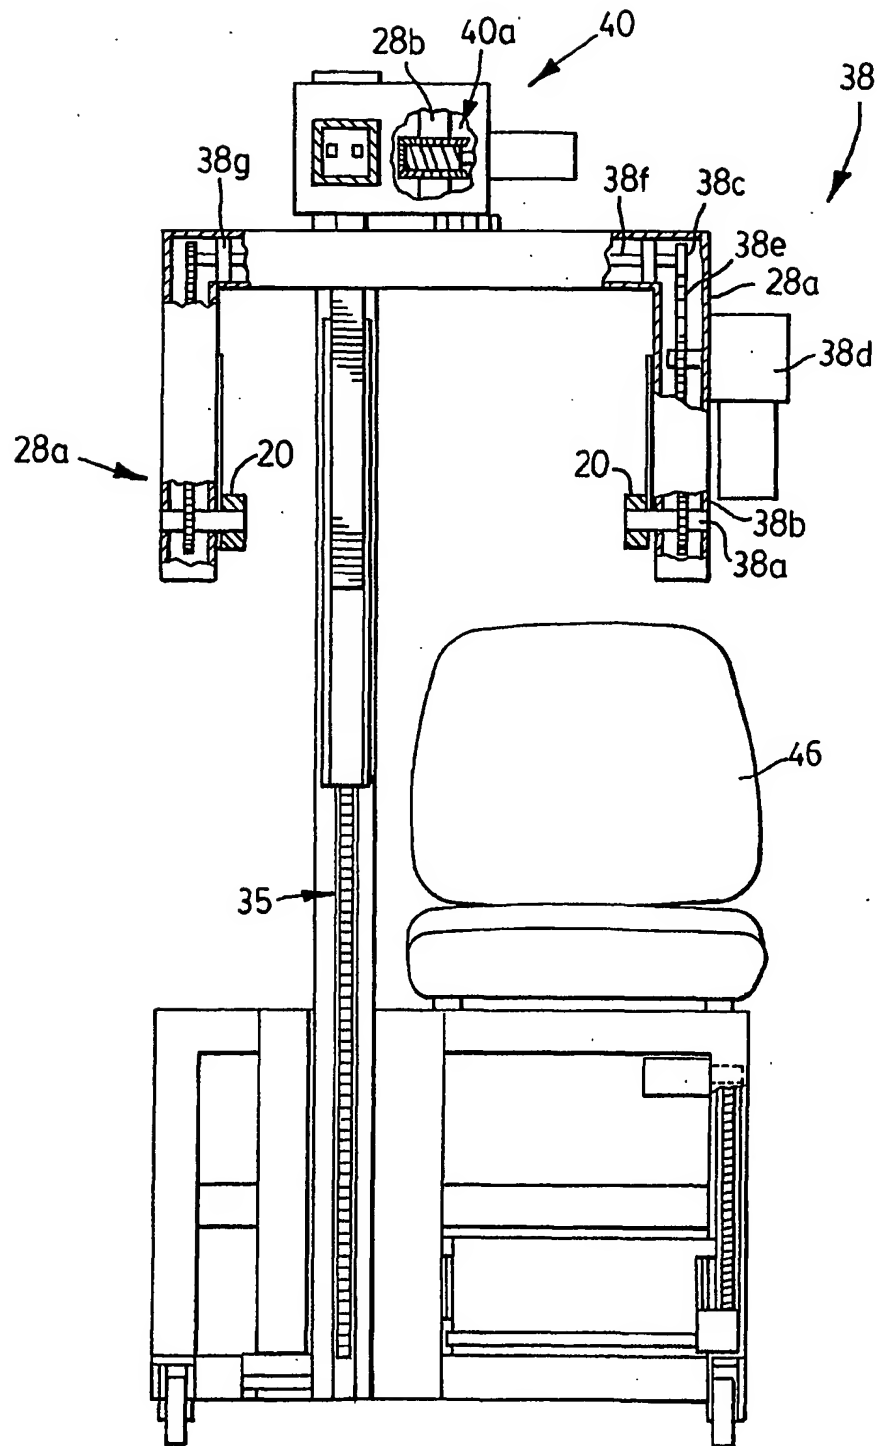


FIG.2

3/15

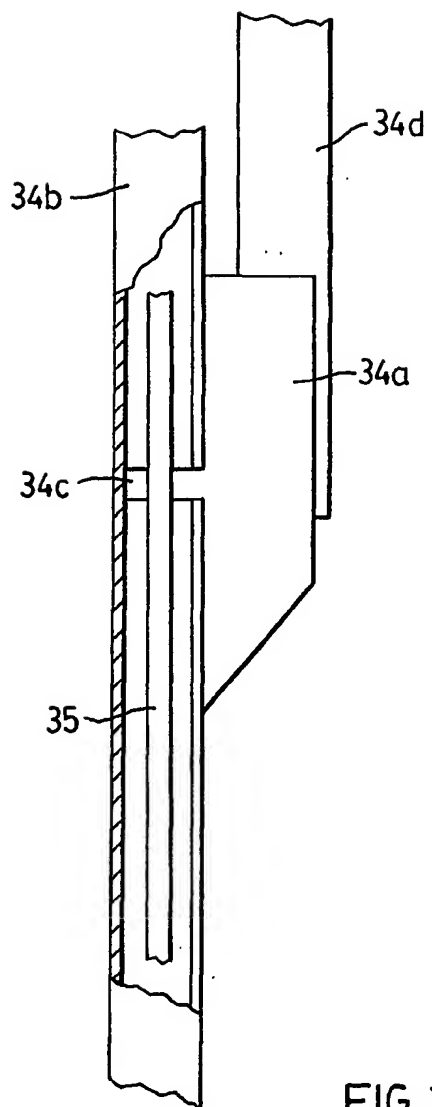


FIG. 2a

4/15

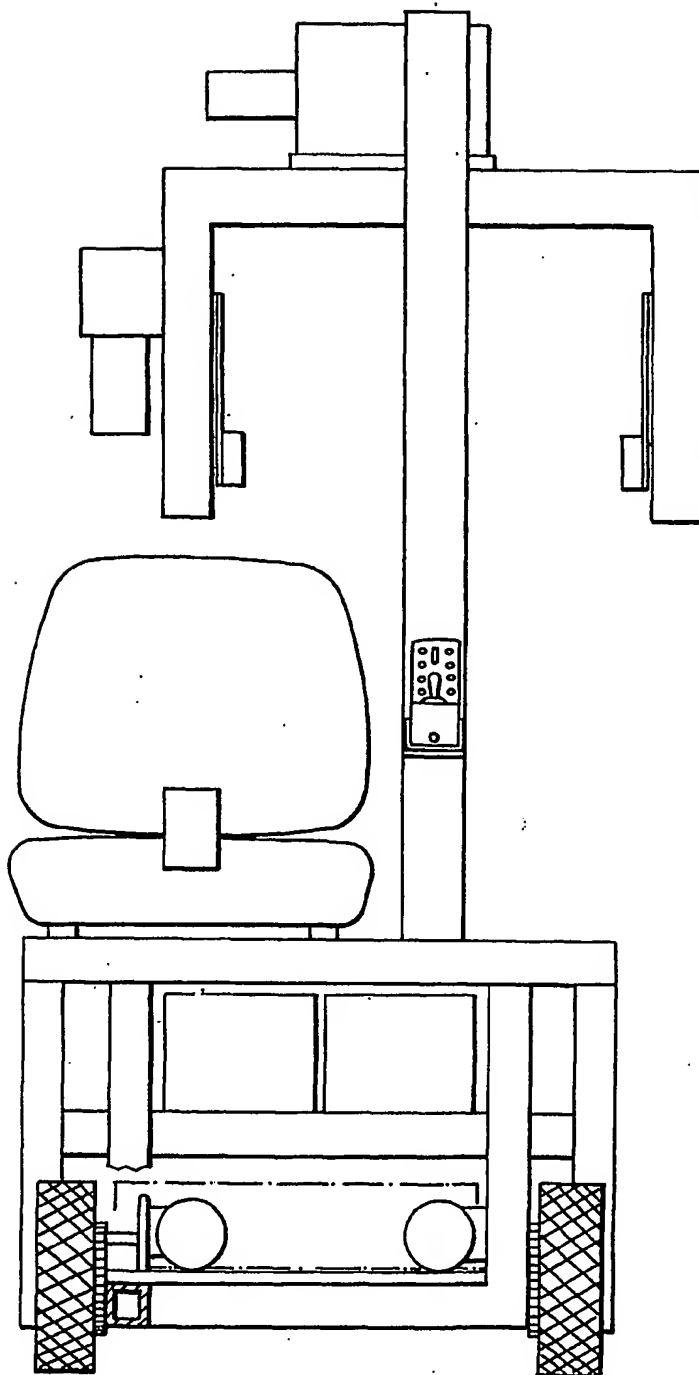


FIG.3

5/15

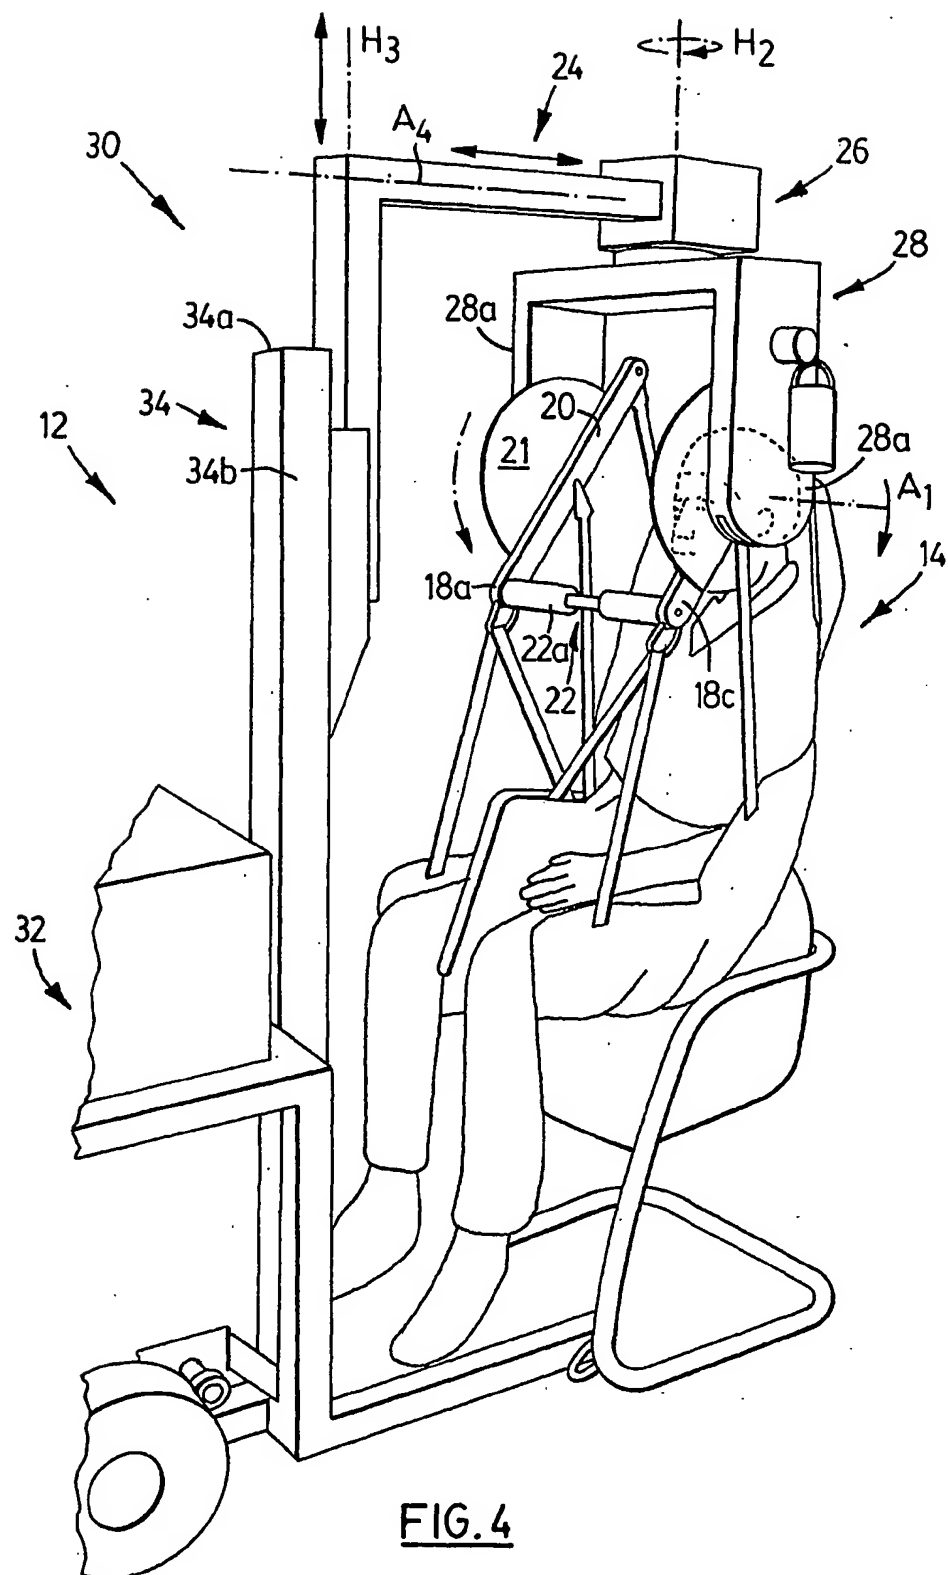


FIG. 4



6/15


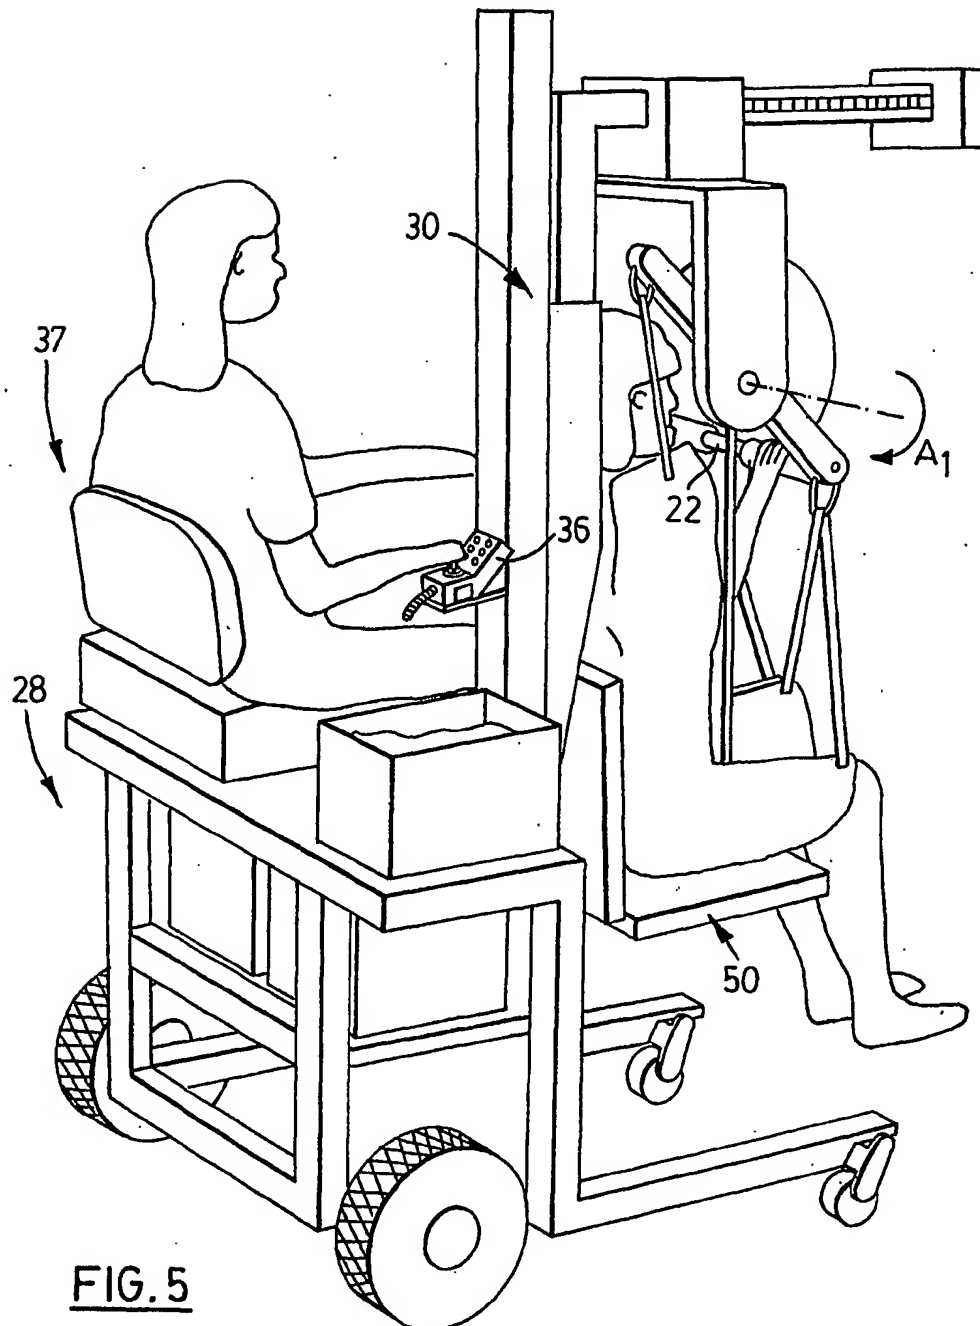


FIG. 5

7/15

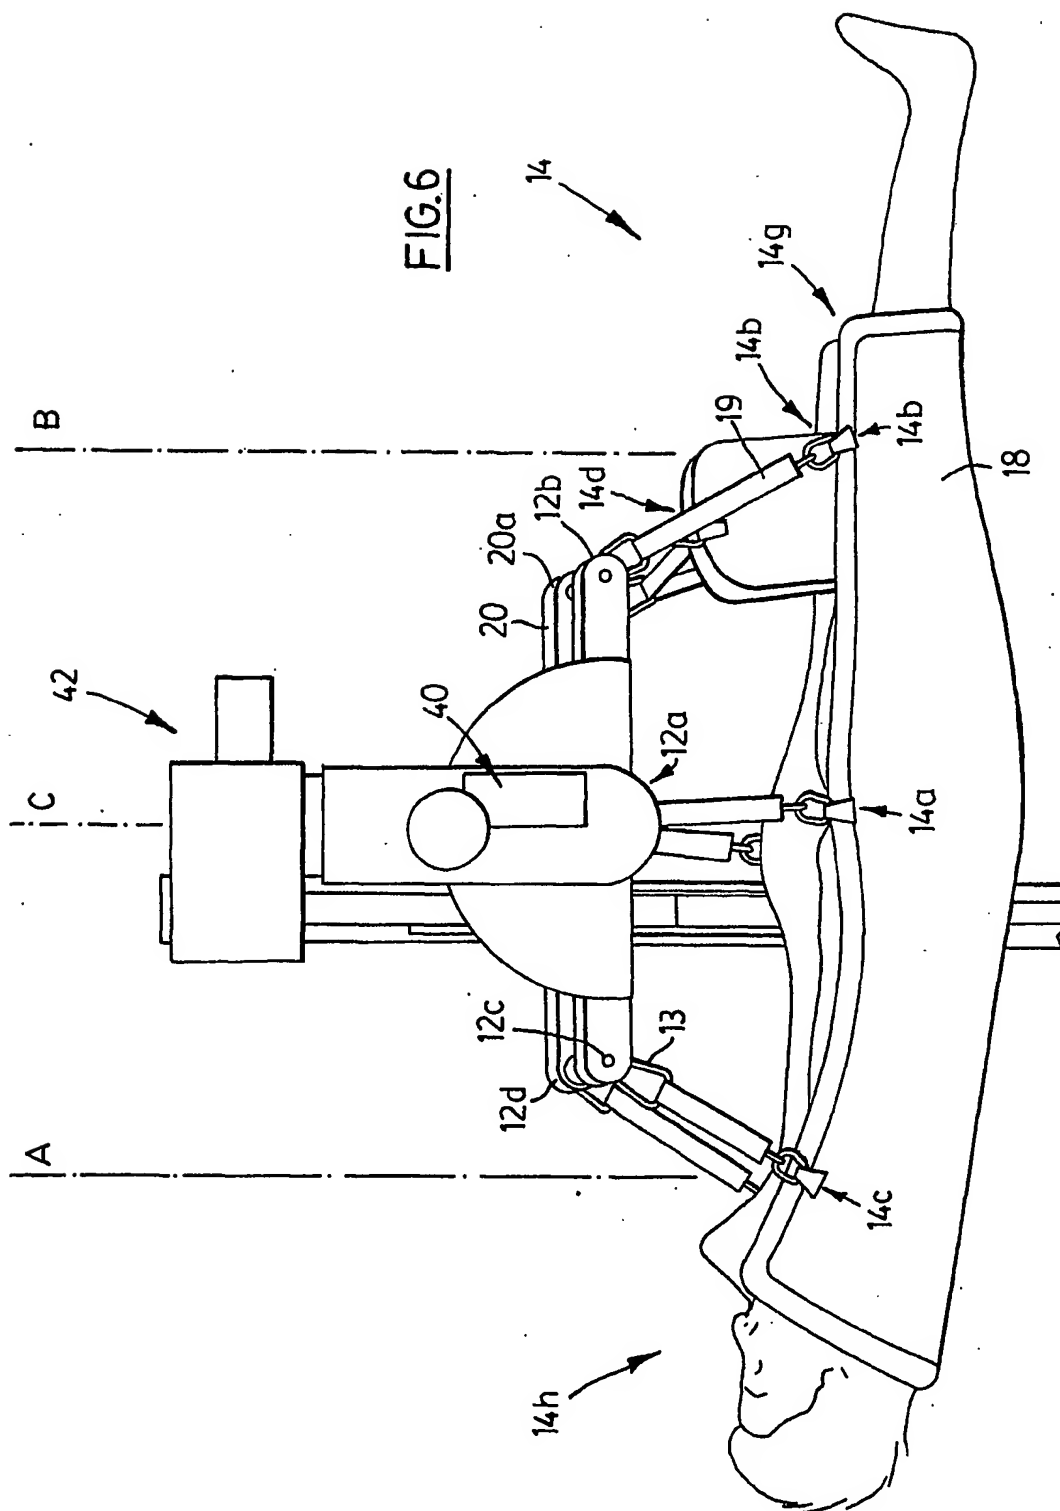

8/15


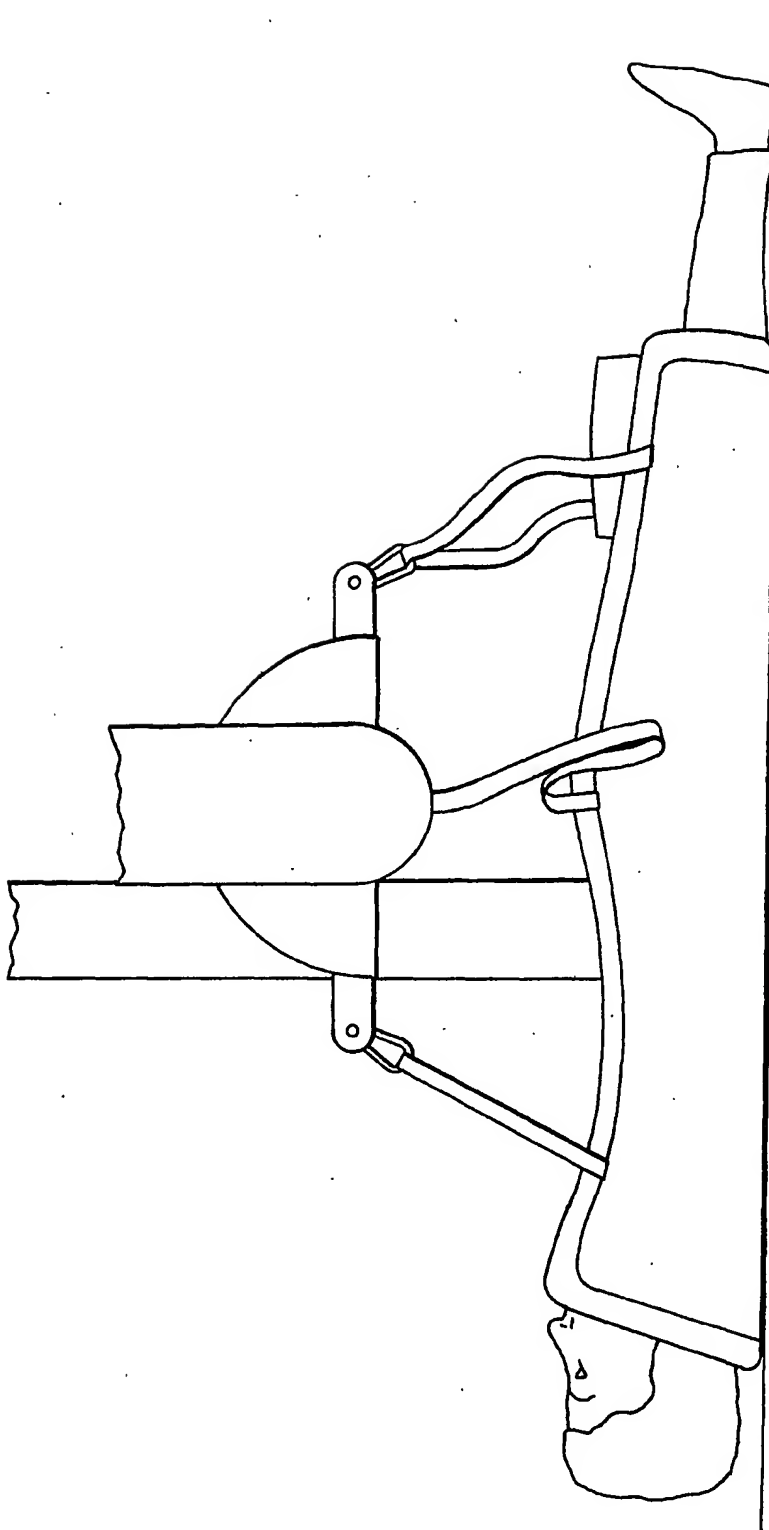



FIG. 6A

9/15


FIG. 6B

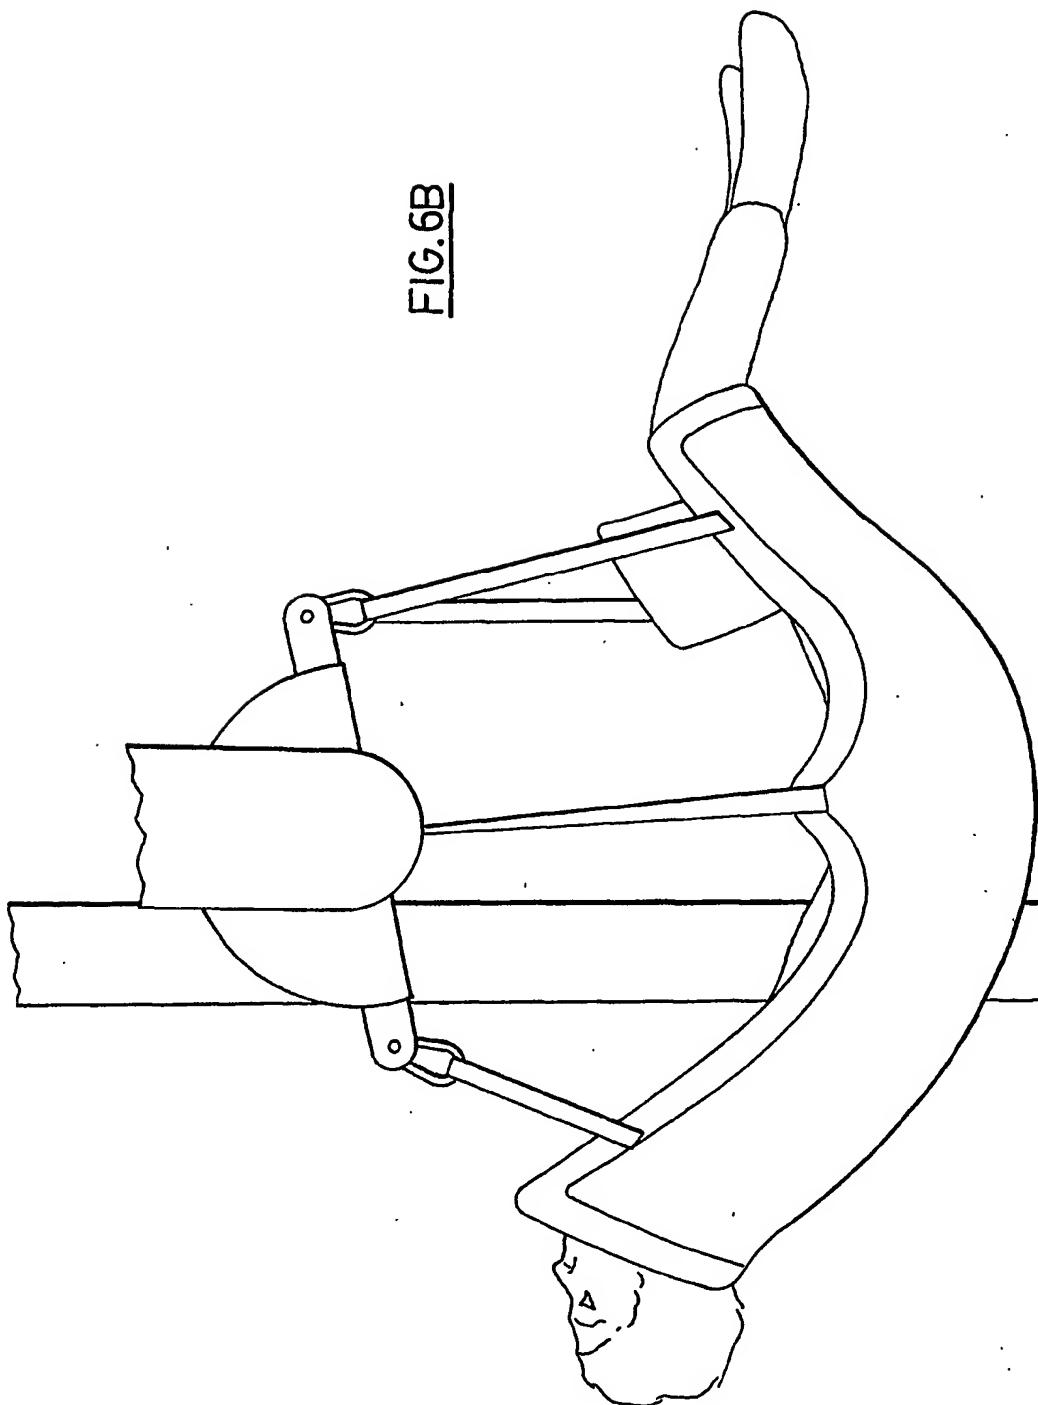

10/15

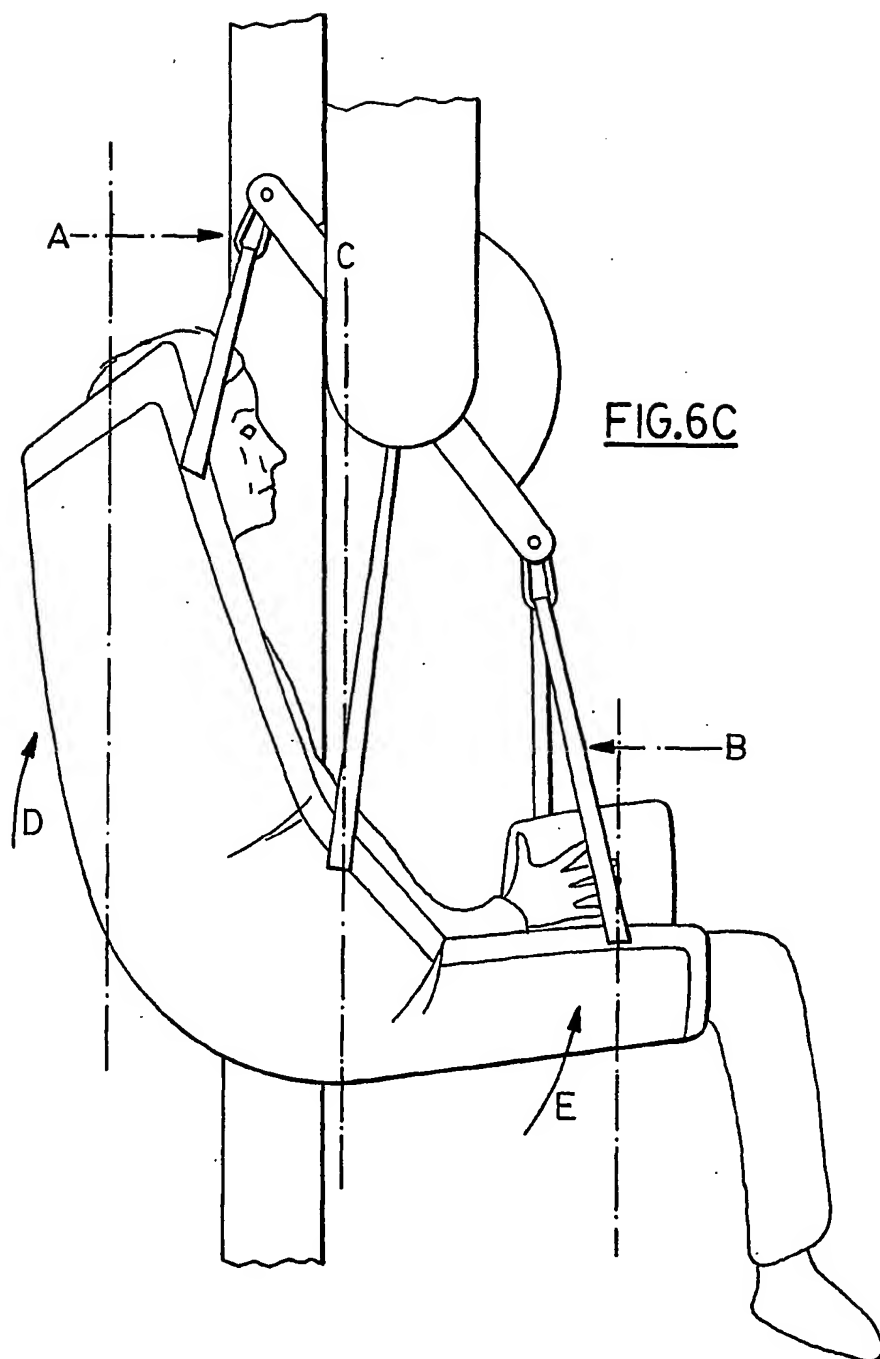

11/15

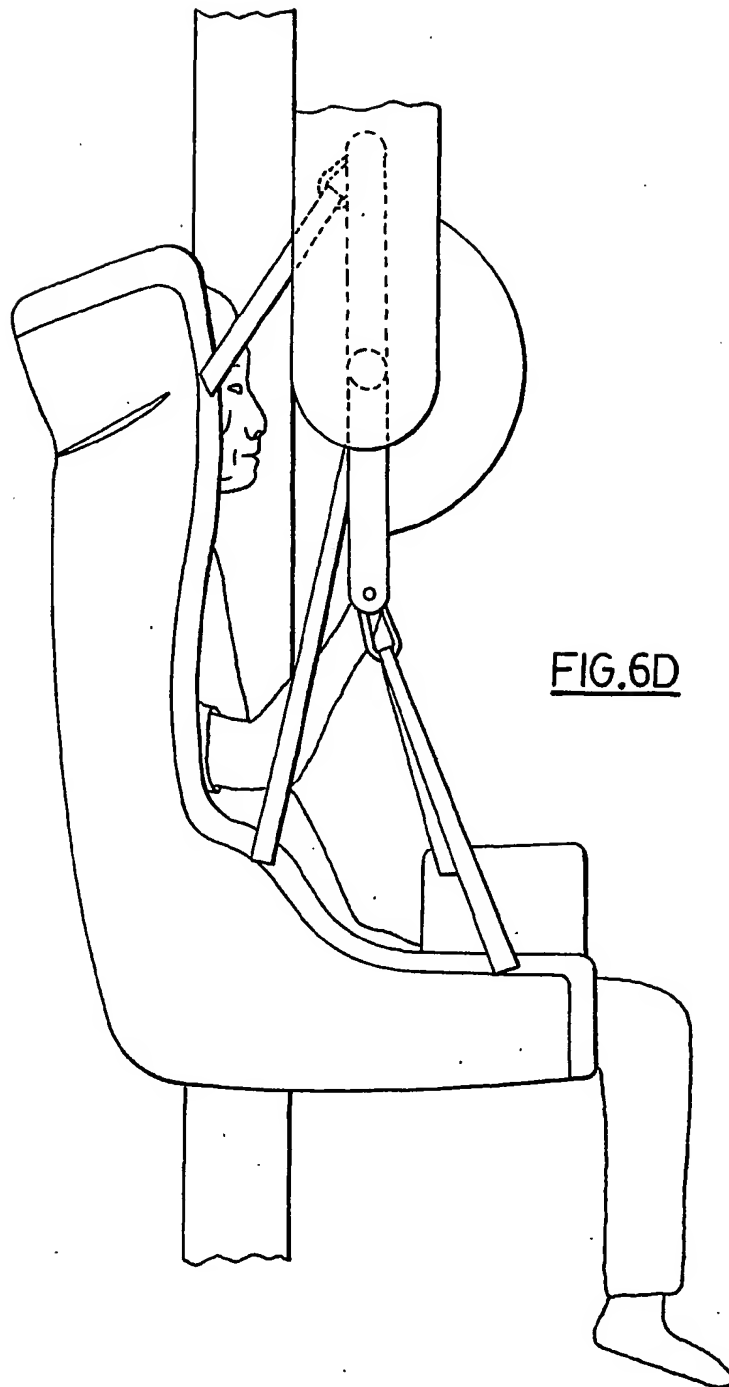

12/15

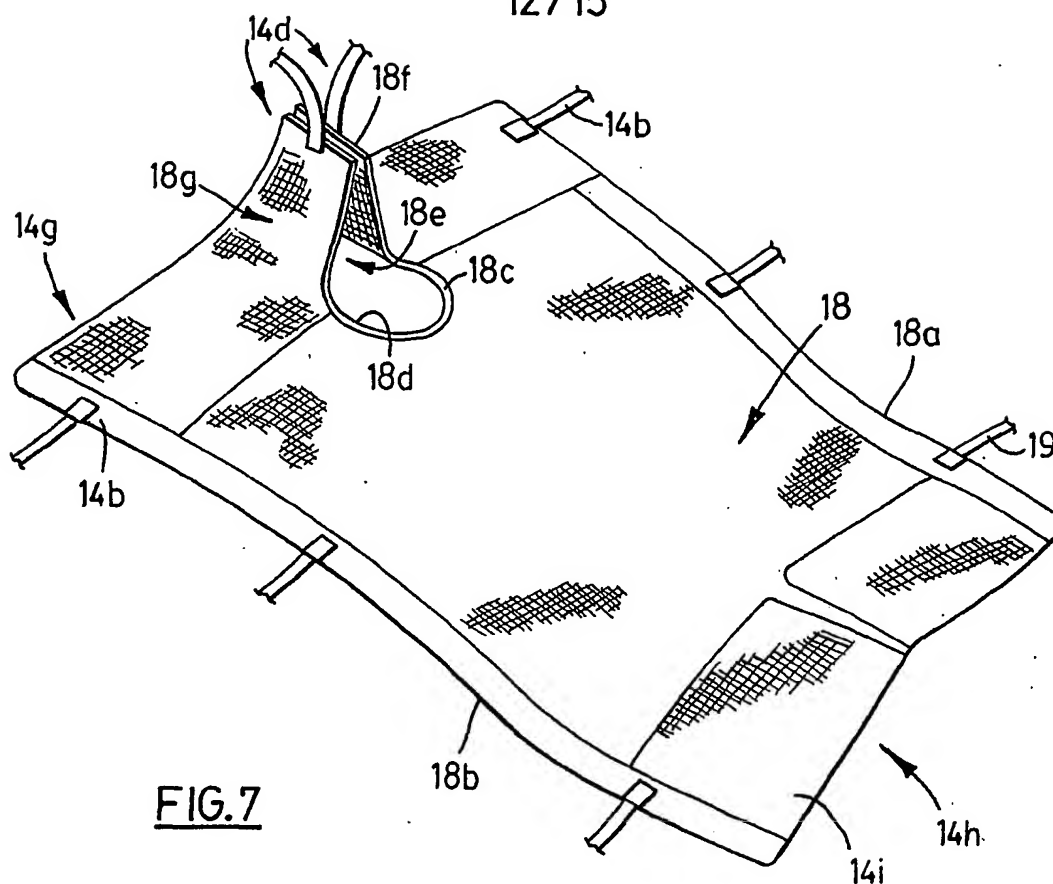


FIG. 7

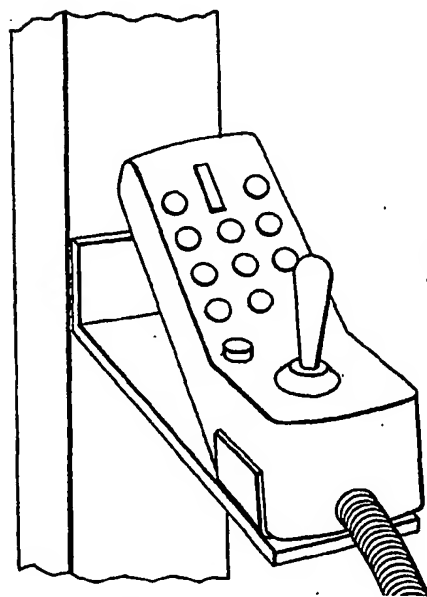


FIG. 8

SUBSTITUTE SHEET (RULE 26)

13/15


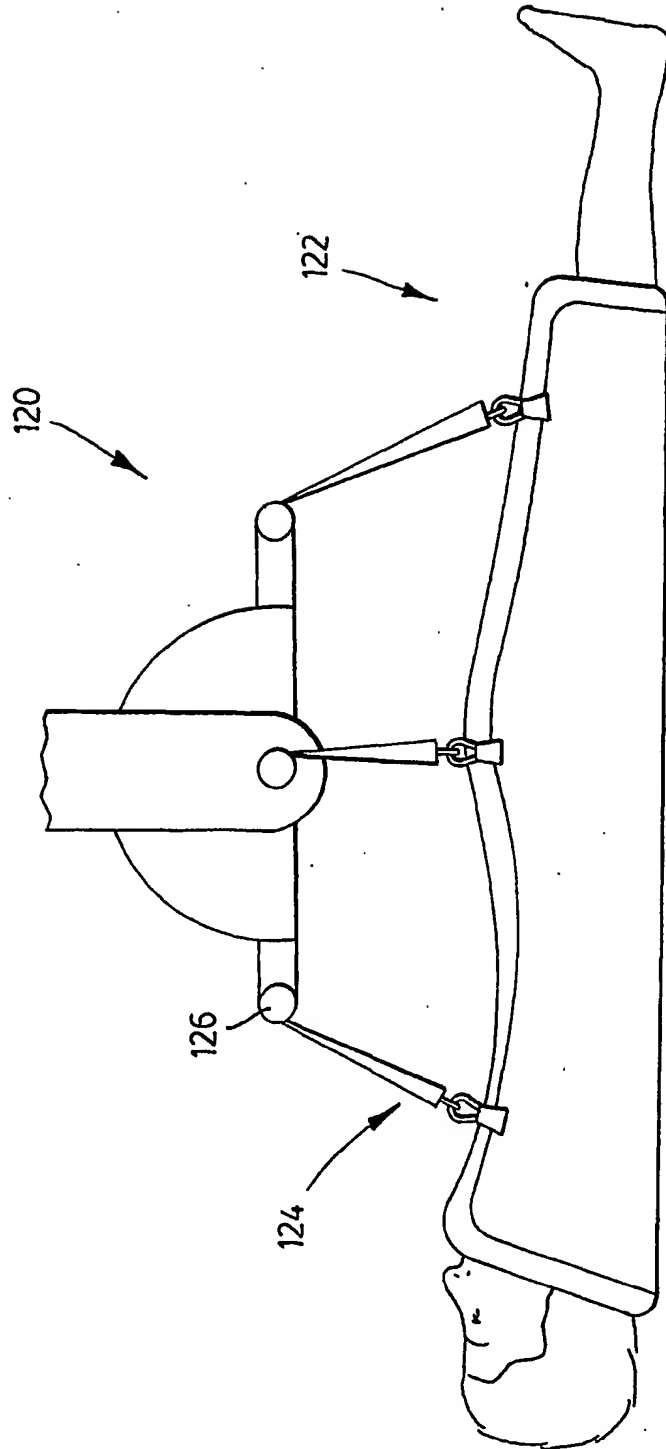



FIG. 9



14/15

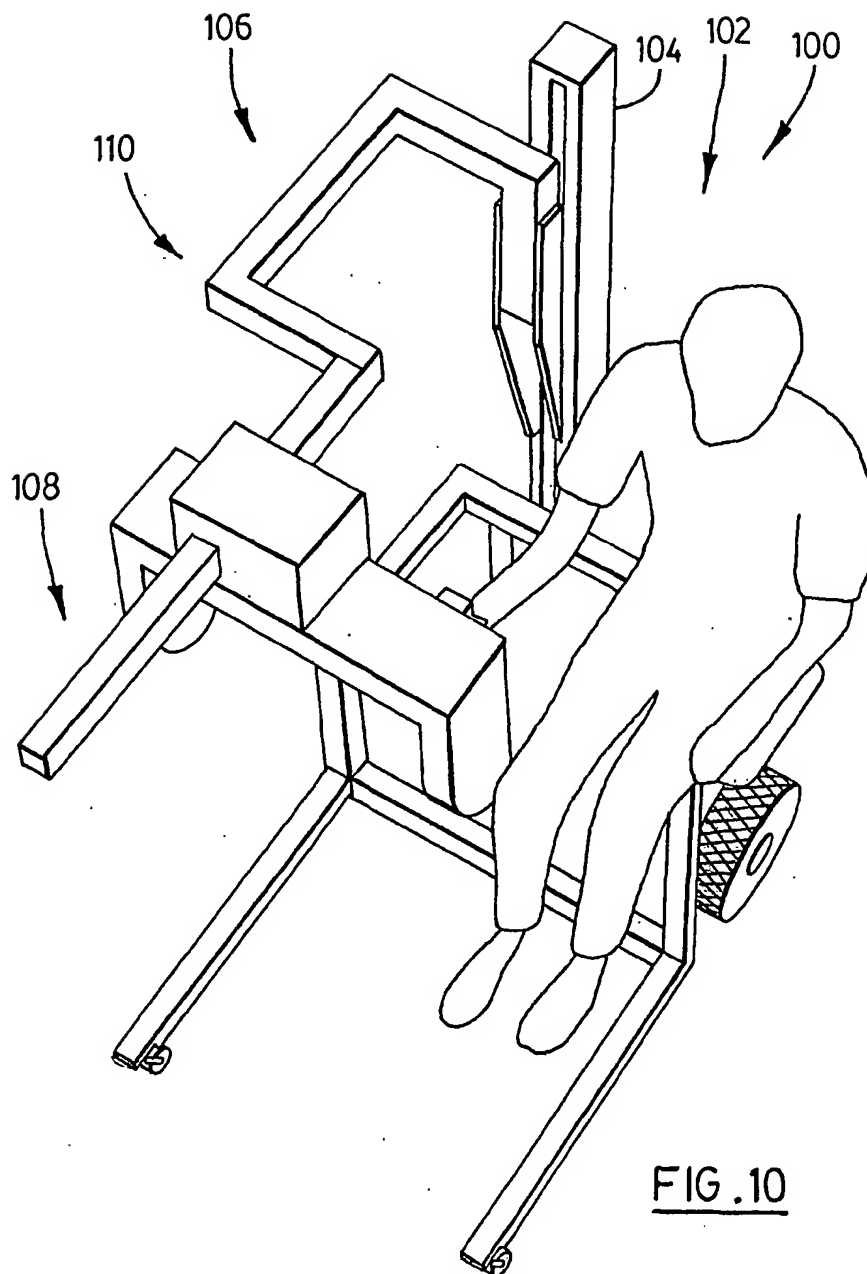

15/15

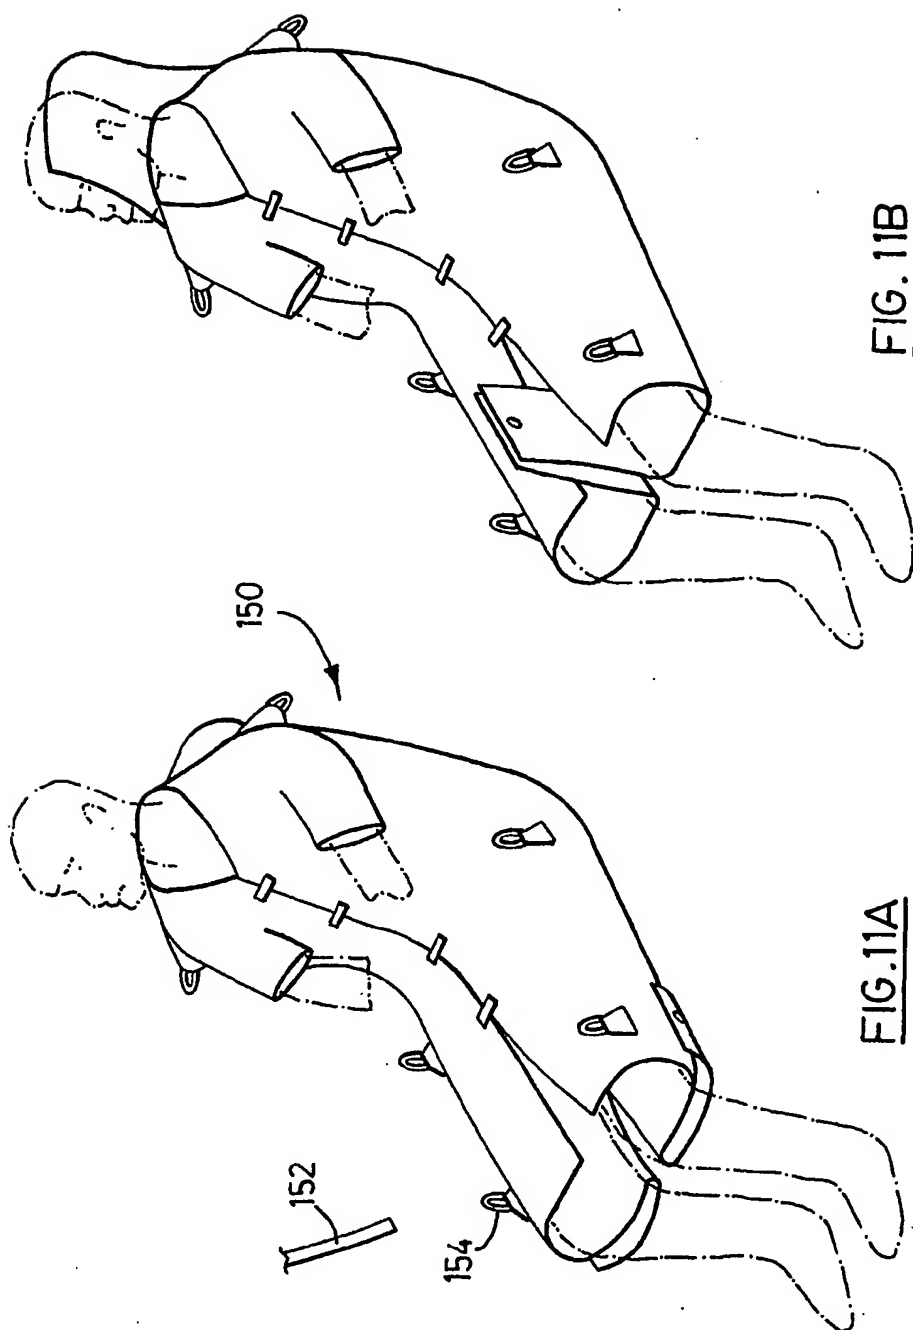

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 00/01137

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A61G7/10

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 111 449 C (CHARLES B. ULRICH) 3 July 1900 (1900-07-03)	1-6, 32, 33, 40, 54-59
Y	the whole document	34, 35, 41-44, 48-51, 60
Y	US 2 272 778 A (PAUL A. REUTER) 10 February 1942 (1942-02-10)	34, 35, 41-44, 48-51, 60
A	page 2, left-hand column, line 10 - line 61; figures	45, 52, 61
A	WO 96 33687 A (ACTUATOR AS ; ANDRESEN HANS KASPER (NO)) 31 October 1996 (1996-10-31) abstract; figures	7, 36
	--- -/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

10 August 2001

Date of mailing of the international search report

21/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Cametz, C

## INTERNATIONAL SEARCH REPORT

Intd      nal Application No  
PCT/CA 00/01137

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 27333 A (CHEESEBORO ROBERT G) 18 May 2000 (2000-05-18) -----	
A	US 5 499 408 A (NIX JOHN W) 19 March 1996 (1996-03-19) -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 00/01137

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 111449 C		NONE	
US 2272778 A	10-02-1942	NONE	
WO 9633687 A	31-10-1996	NO 951590 A AU 5660796 A	28-10-1996 18-11-1996
WO 0027333 A	18-05-2000	AU 1469500 A	29-05-2000
US 5499408 A	19-03-1996	NONE	